
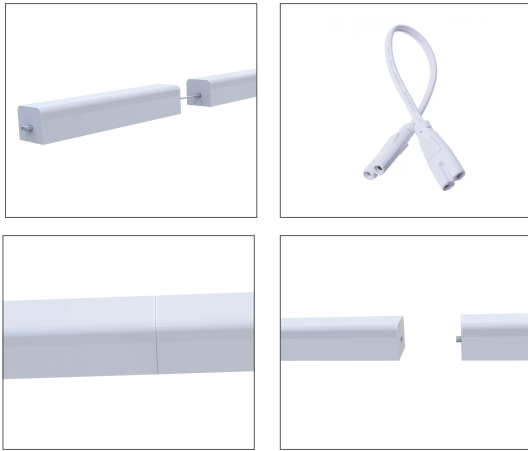


LED Linkable Linear Light

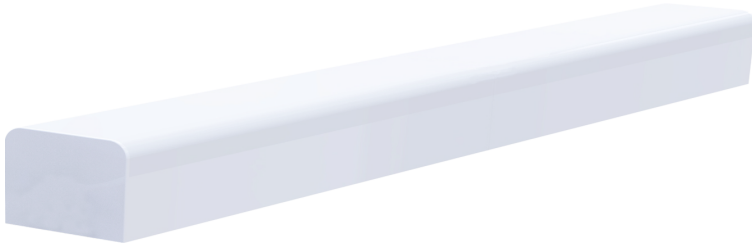

Product Description:

QCOM linkable linear LED battens are simple solutions for luminaires that use linear light sources such as wall sconces linear, bath ceiling lights and wall lights. These designs feature quick-connects for wires on each end and can be linked end-to-end to retrofit existing luminaires. The batten is cost-effective replacement for linear fluorescent light sources in residential and commercial fixtures.



Feature:

1. Slim and trunkable, integrated design
2. Polycarbonate housing with one pc extrusion process
3. Slim profile: Ideal for task lighting / cove lighting applications

Specifications:

Size	Qlink-300-830	Qlink-600-830	Qlink-900-830	Qlink-1200-830
Body Material	Polycarbonate			
Nominal Wattage (W)	5W/10W	9W/18W	14W/27W	18W/36W
Lumens Delivered (lm)	600lm/1200lm	1080lm/2160lm	1680lm/3240lm	2160lm/4320lm
Efficacy (lm/W)	120lm/W			
CRI	80Ra			
Color Temperature (K)	3000K			
L70 Lifetime (Hrs)	30,000hrs			
Input Voltage	220-240VAC 50/60Hz			
Beam Angle	110°			
Power Factor	0.5		0.9	
Operating Temperature	-20 - 40° C			
Warm-up time (60%)	<0.5s			
Electrical Grade	Class II			
SDCM	<6			
Mounting	Ceiling Mount			
Type of protection	IP40			

Dimension:



Size	0.3M	0.6M	0.9M	1.2M
L(mm)	290	590	890	1190