
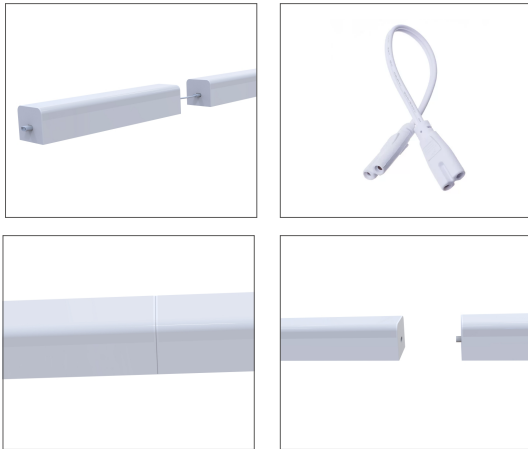


LED Linkable Linear Light

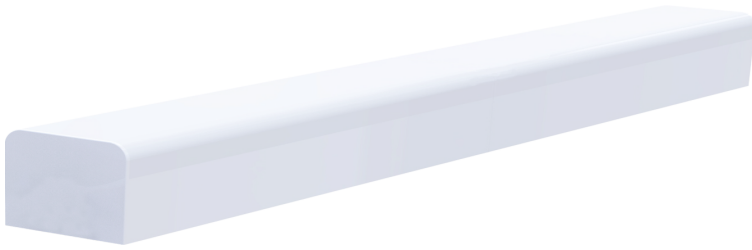

Product Description:

QCOM linkable linear LED battens are simple solutions for luminaires that use linear light sources such as wall sconces linear, bath ceiling lights and wall lights. These designs feature quick-connects for wires on each end and can be linked end-to-end to retrofit existing luminaires. The batten is cost-effective replacement for linear fluorescent light sources in residential and commercial fixtures.

Feature:

1. Slim and trunkable, integrated design
2. Polycarbonate housing with one pc extrusion process
3. Slim profile: Ideal for task lighting / cove lighting applications

Specifications:

Size	Qlink-1600-830
Body Material	Polycarbonate
Nominal Wattage (W)	24
Lumens Delivered (lm)	2400lm
Efficacy (lm/W)	100lm/W
CRI	80Ra
Color Temperature (K)	3000K
L70 Lifetime (Hrs)	30,000hrs
Input Voltage	220-240VAC 50/60Hz
Beam Angle	110°
Power Factor	0.9
Operating Temperature	-20 - 40° C
Warm-up time (60%)	<0.5s
Electrical Grade	Class II
SDCM	<6
Mounting	Ceiling Mount
Type of protection	IP40

Dimension:

Unit: (mm)

